



OKW+B Fencing System

Function: Stock control, rouge buffalo, flood gate

Material: High tensile steel, with flex

Coating: GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating.

Thickness: 2.2mm thick

Width: 86mm wide

Length: 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

Special Features:

- 7 square spine holes for the **OKBC** clip (to make sure that it does not twist)
- Barbed wire can be easily loaded up - quick twist of the barb
- Barbed wire can easily be tightened at the end assemblies as the barb wire flows through the **OKBC** clip.
- Rouge Buffalo Clips are also available
- **Designed and manufactured in Australia**



Ocloc Kakadu Barb Wire Clip **OKBC**



Ocloc Kakadu Rouge Buffalo Clip **RBC**

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

OK Fencing Systems

Designed and Manufactured in Australia

Ocloc Kakadu W+B fence post 150mm wire hole spacings

Function: Stock control



Material: High tensile steel, with flex

Coating: GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating www.galfan.com

Thickness: 2.2mm thick

Width: 86mm wide

Length: 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

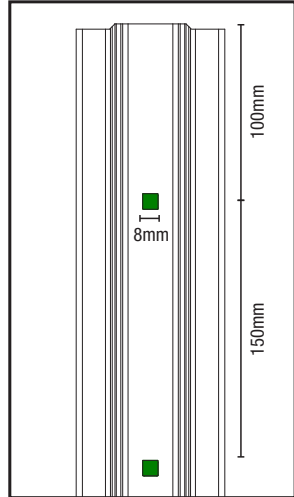


Barbed wire slots



OKBC Designed to fit in 8.5mm for floating fence




OKBC + Barb Wire



OKWAS + OKWAS -B-8



Flood Gate - Barcoo River QLD

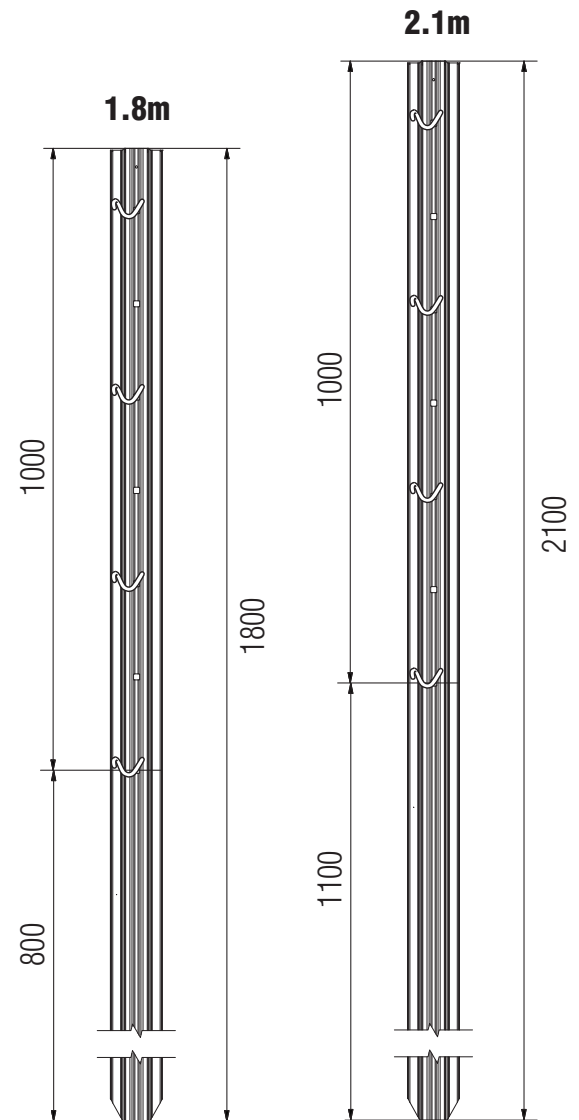

Lengths of OKW+B	1.8m 6ft	2.1m 7ft
Square holes down the spine	7	7

OKBC is the Ocloc Kakadu barb wire clip

RBC is a Rogue Buffalo Clip

OK products are carbon offset at manufacturing — Australian designed & manufactured




Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

OCAG OK

OK Fencing Systems

Designed and Manufactured in Australia

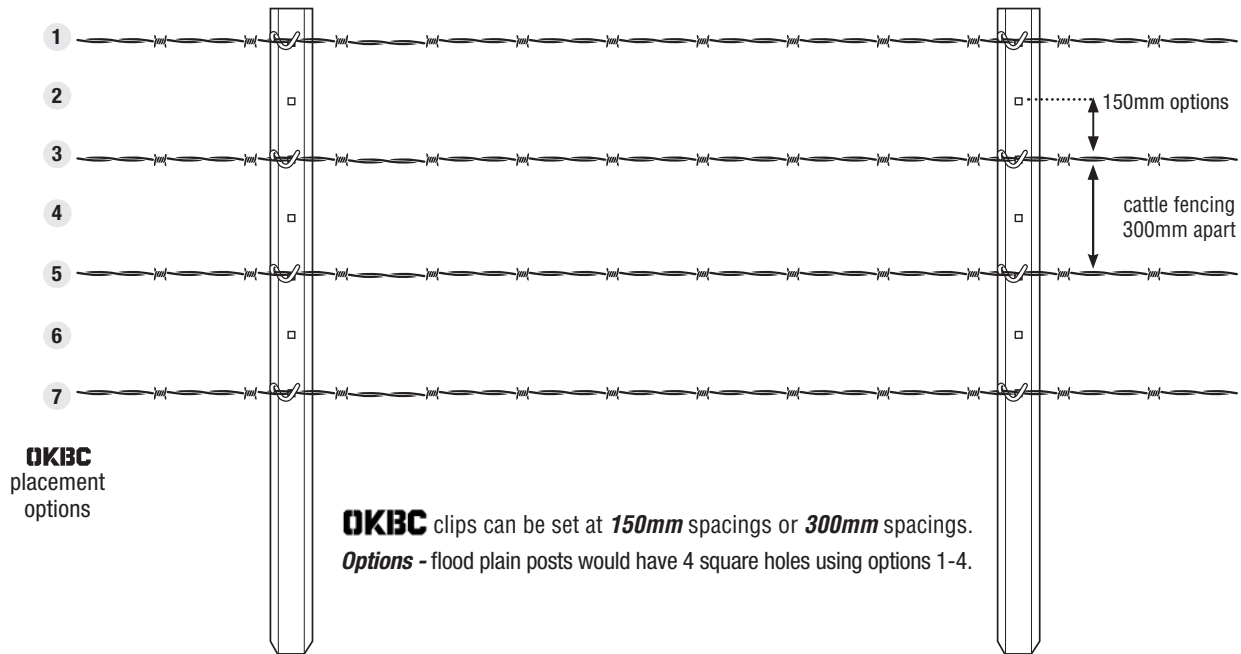

Placement of barb wire on post
150mm or **300mm** options



Ocloc Kakadu W barb wire hole



Ocloc Kakadu Barbed Wire Clip
OKBC



Rogue Buffalo Clip **RBC**

The **RBC** allows buffalo to move through the fence without destroying it.

Ocloc Kakadu **OKW+B**

OKBC allows barb wire to be easily inserted in a twitching motion.

GALFAN for corrosion resistance.
 More information can be found at:
www.galfan.com

Strength: 

Square holes are 150mm apart options. You can set your barb wire at 300mm intervals.

Bundles of **200**
 (special request bundles of 100)

Available in several lengths

1.8m - 6 feet

2.4m - 8 feet

2.1m - 7 feet

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au


OCAG OK



Flood Gate - Barcoo River QLD



Ratchet drive M8 bolt to attach OKWAS/B8 bracket to angle stay

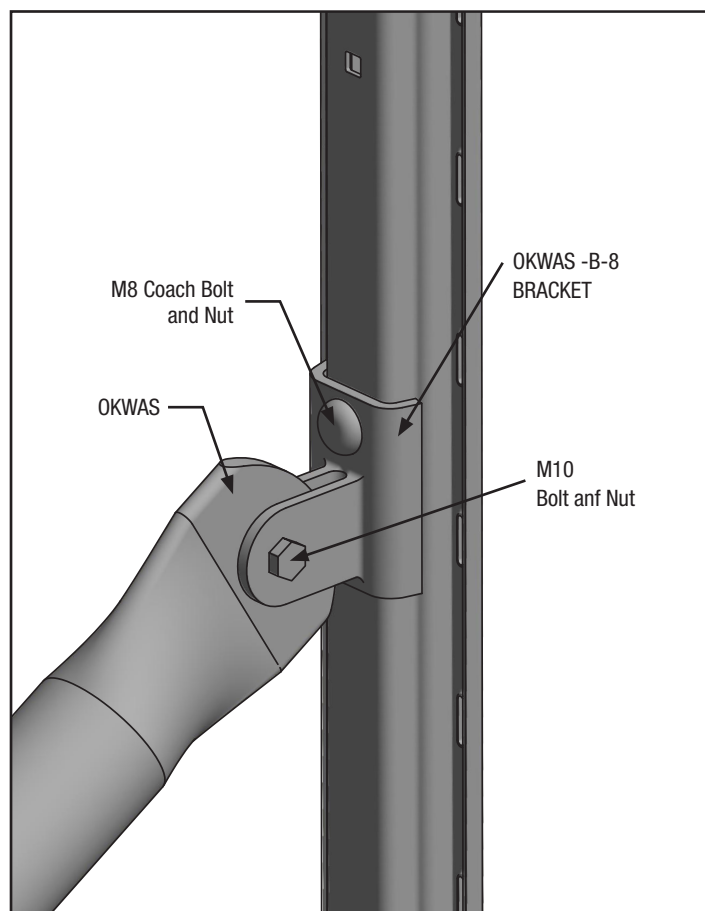

OKWAS Angle Stay

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au