



OKW Post / Picket

Function: Live stock, exclusion and conservation. Barb wire fencing, lane ways and boundaries. Swinging fence flood gate across the river. Strengthening post

Material: High tensile steel, with flex and return. Max wildlife or stock impact

Coating: GALFAN Coating 5% Aluminium, Rare Metals, Magnesium, 95% Zinc, the ultimate in corrosive resistant coating

Thickness: 2.2mm thick

Width: 86mm wide post/picket

Length: 1.65m (5.4ft), 1.8m (6ft), 2.1m (7ft), 2.4m (8ft), 2.7m (8.8ft)

Insert Depth Options: 585mm, 735mm

Wire Holes: Available in 75mm wire hole spacings, suitable for multiple mesh spacing

Special Features:

- Easy to load wire slots for twitching - 300mm x 2.5mm thick
- Heavy rocky soil strengthening post
- The profile enhances strength and rigidity in the ground
- **Designed and manufactured in Australia**



OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

OCAG OK

Ocloc Kakadu OKW fence post/picket - 75mm wire slot spacings

Function: Stock control, laneways, internal & exclusion

Coating: GALFAN Coating - rare metals, aluminium, magnesium, zinc

Wire Slots: **75mm spacings** - suits all mesh profiles + **top wire/barb wire slot 17mm from the top** (included in the tabled slot numbers)

Material: High tensile steel, with flex

Thickness: **2.2mm thick**

Width: 86mm wide

Length: 1.65m (5.4ft), 1.8m (6ft), 2.1m (7ft), 2.4m (8ft), 2.7m (8.8ft)



Insert Depth: **585mm**

Twich Wire: 2.5mm


Strength: High tensile steel




585mm
Insert Depth

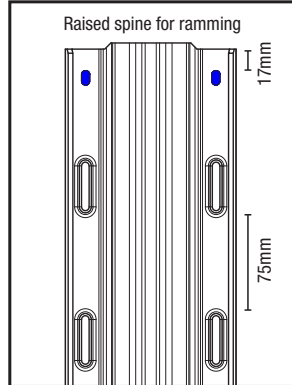


Wire slots



Ground level view bottom wire hole



Pointed tip for easy ramming

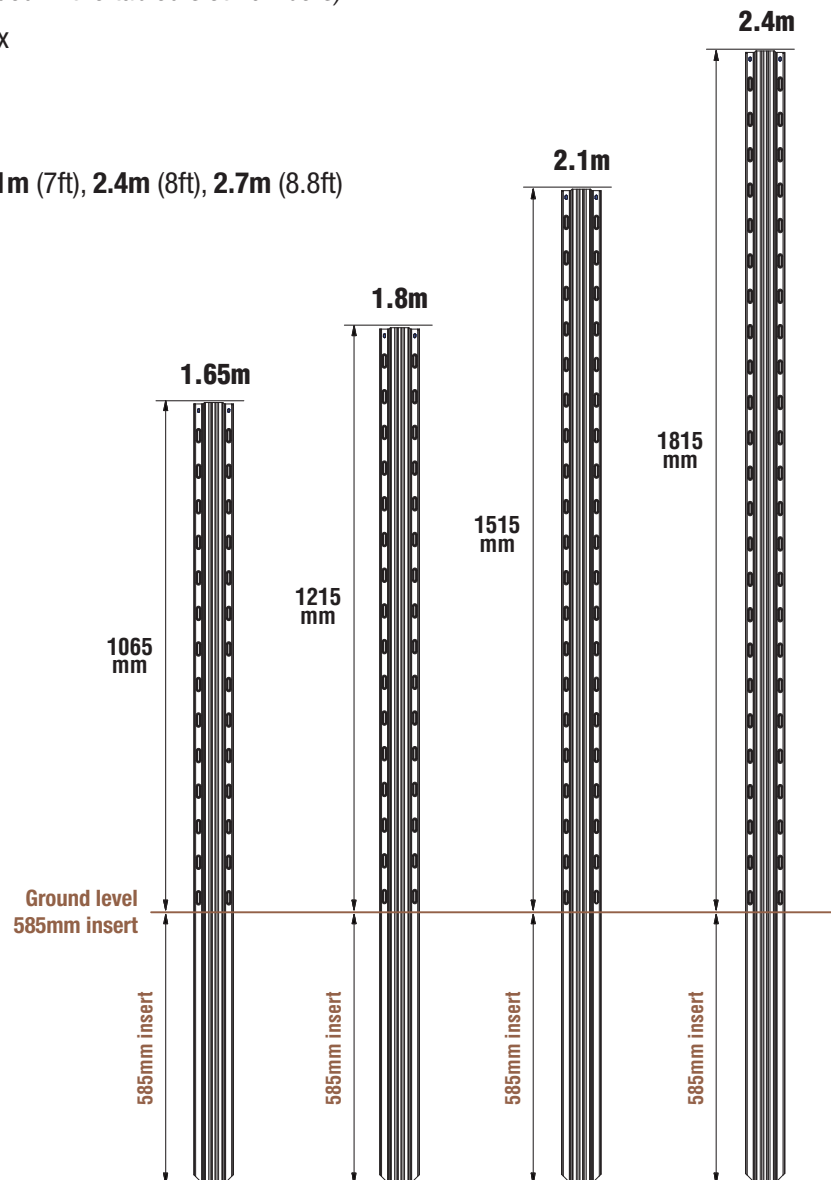

OKW order codes	OKW1.65(585)	OKW1.8(585)	OKW2.1(585)	OKW2.4(585)	OKW2.7(585)
OKW lengths	1.65m 5.4ft	1.8m 6ft	2.1m 7ft	2.4m 8ft	2.7m 8.8ft
Wire hole numbers at spacings 75mm	15	17	21	25	27

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

OCAG OK

Ocloc Kakadu OKW fence post/picket - 75mm wire slot spacings

Function: Stock control, laneways, internal & exclusion

Coating: GALFAN Coating - rare metals, aluminium, magnesium, zinc

Wire Slots: **75mm spacings** - suits all mesh profiles + **top wire/barb wire slot 17mm from the top** (included in the tabled slot numbers)

Material: High tensile steel, with flex

Thickness: **2.2mm thick**

Width: 86mm wide

Length: 1.8m (6ft), 2.1m (7ft), 2.4m (8ft)



Insert Depth: **735mm**

Twist Wire: 2.5mm


Strength: High tensile steel




735mm
Insert Depth

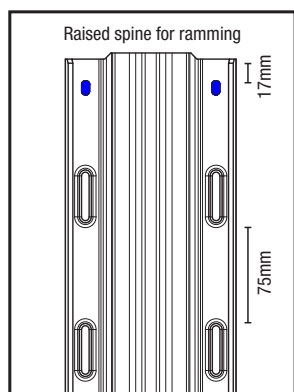


Wire slots



Ground level view bottom wire hole



Pointed tip for easy ramming

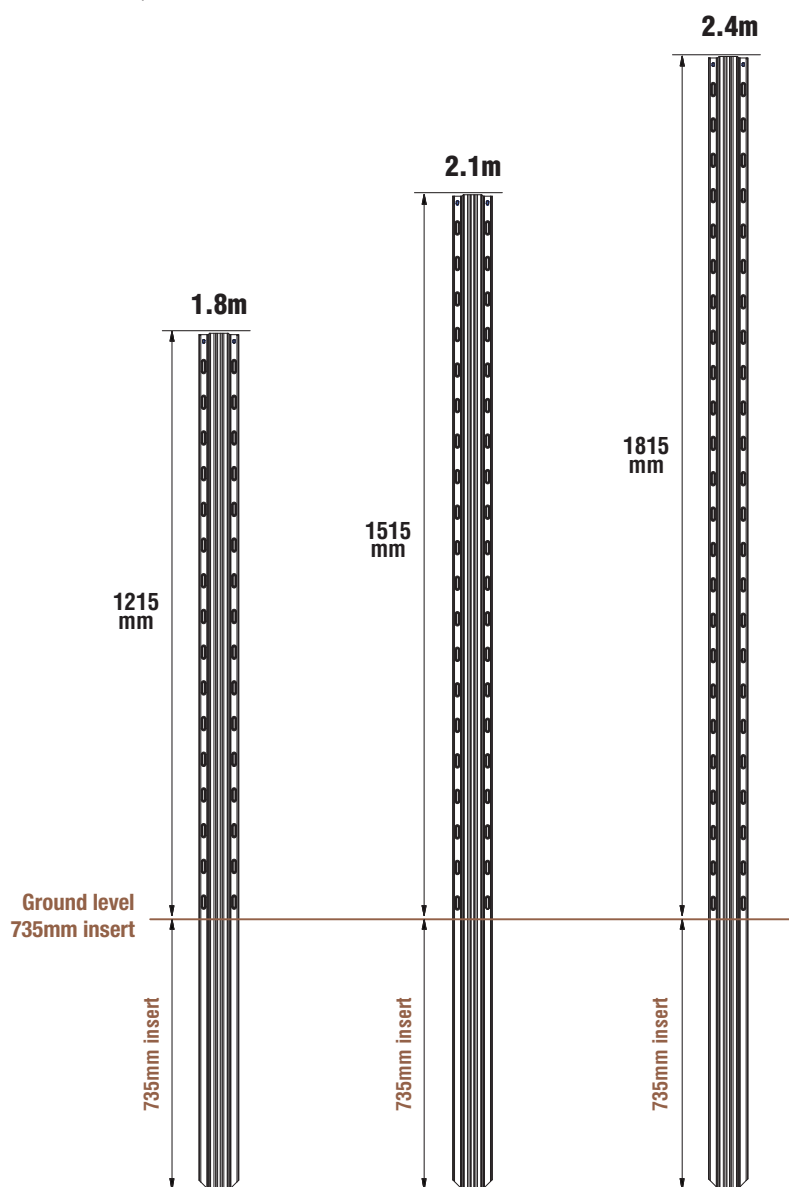

OKW order codes	OKW1.8(735)	OKW2.1(735)	OKW2.4(735)
OKW lengths	1.8m 6ft	2.1m 7ft	2.4m 8ft
Wire hole numbers at spacings 75mm	17	21	25

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

OCAG OK