

## OK Fencing Systems

Designed and Manufactured in Australia



### OKA+B Fencing System

**Function:** Stock control, flood gate

**Material:** High tensile steel, with flex

**Coating:** GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating.

**Thickness:** 1.8mm thick

**Width:** 86mm wide

**Length:** 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

#### Special Features:

- 7 square spine holes for the **OKBC** clip (to make sure that it does not twist)
- Barbed wire can be easily loaded up - quick twist of the barb
- Barbed wire can easily be tightened at the end assemblies as the barb wire flows through the **OKBC** clip.
- Rouge Buffalo Clips are also available
- **Designed and manufactured in Australia**



Ocloc Kakadu Barb Wire Clip **OKBC**



Ocloc Kakadu Rouge Buffalo Clip **RBC**

*OK products are carbon offset at manufacturing — Australian designed & manufactured*



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: [nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)

[www.ocloc.com.au](http://www.ocloc.com.au)

# OCAG OK



## OK Fencing Systems

Designed and Manufactured in Australia

### Ocloc Kakadu A+B fence post 150mm wire hole spacings

**Function:** Stock control



**Material:** High tensile steel, with flex

**Coating:** **GALFAN** Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating [www.galfan.com](http://www.galfan.com)

**Thickness:** 1.8mm thick

**Width:** 86mm wide

**Length:** 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

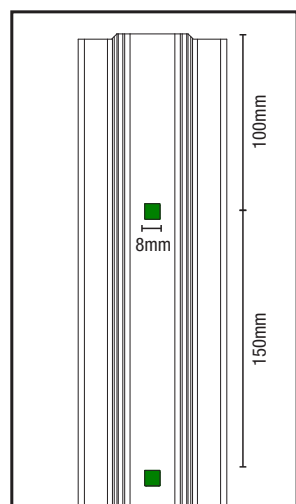


Barbed wire slots



**OKBC** Designed to fit in 8.5mm for floating fence




**OKBC** + Barb Wire



OKWAS + OKWAS -B-8



Flood Gate - Barcoo River QLD

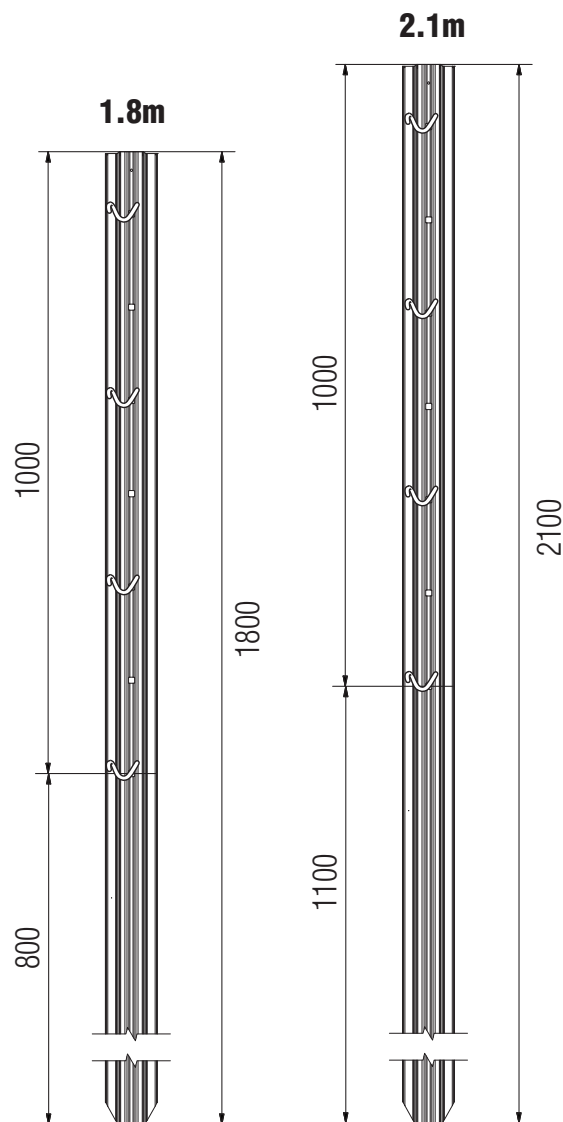

Lengths of <b>OKA+B</b>	1.8m   6ft	2.1m   7ft
Square holes down the spine	7	7

**OKBC** is the Ocloc Kakadu barb wire clip

**RBC** is a Rogue Buffalo Clip

OK products are carbon offset at manufacturing — Australian designed & manufactured




Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: [nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)

[www.ocloc.com.au](http://www.ocloc.com.au)

# OCAG OK

## OK Fencing Systems

Designed and Manufactured in Australia

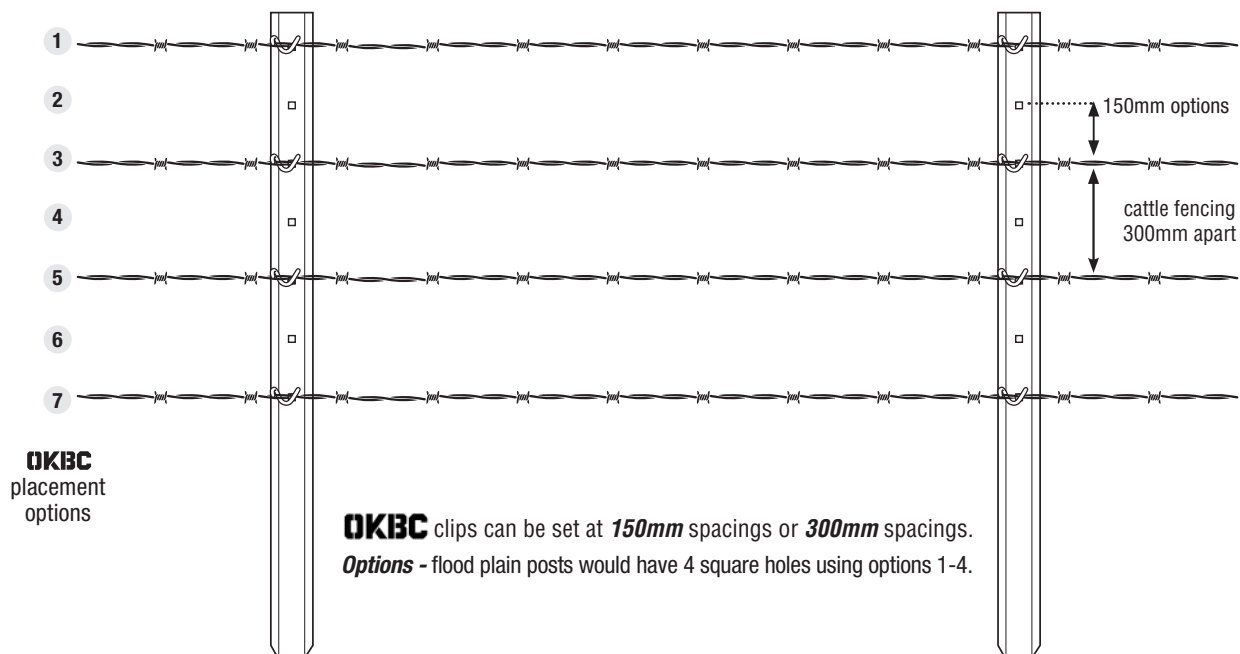

Placement of barb wire on post  
**150mm** or **300mm** options



Ocloc Kakadu A barb wire hole



Ocloc Kakadu Barbed Wire Clip  
**OKBC**



Rogue Buffalo Clip **RBC**

The **RBC** allows buffalo to move through the fence without destroying it.

### Ocloc Kakadu **OKA+B**

**OKBC** allows barb wire to be easily inserted in a twitching motion.

**GALFAN** for corrosion resistance.  
More information can be found at:  
[www.galfan.com](http://www.galfan.com)

Strength:  

**Square holes are 150mm** apart options. You can set your barb wire at 300mm intervals.

Bundles of **200**  
(special request bundles of 100)

Available in several lengths

1.8m - 6 feet

2.4m - 8 feet

2.1m - 7 feet

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: [nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)  
[www.ocloc.com.au](http://www.ocloc.com.au)

# OCAG OK



## OK Fencing Systems


Designed and Manufactured in Australia



Flood Gate - Barcoo River QLD



Ratchet drive M8 bolt to attach OKWAS/B8 bracket to angle stay

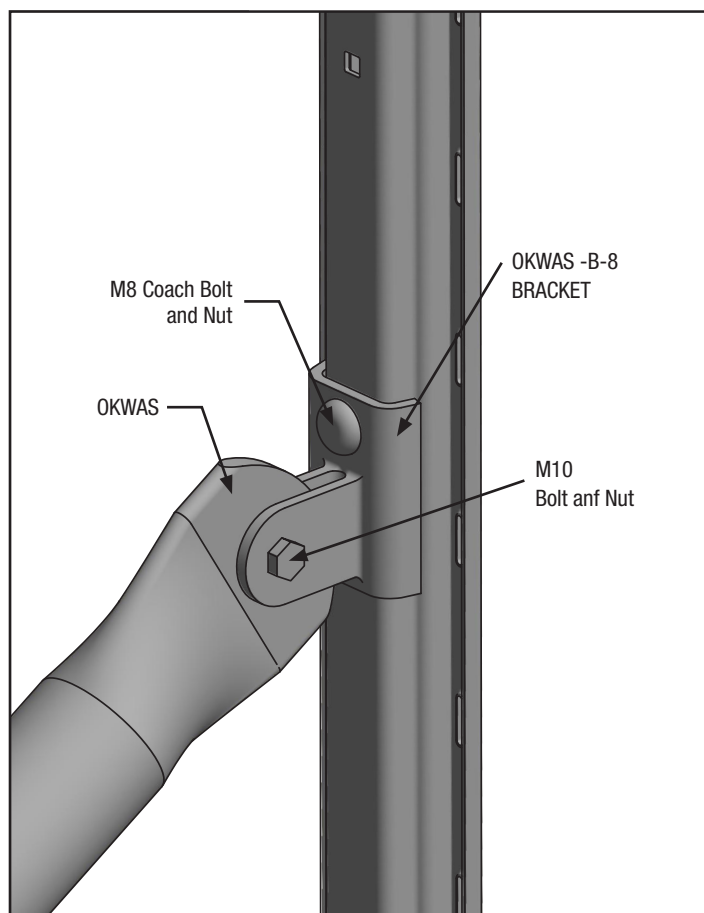

OKWAS Angle Stay

*OK products are carbon offset at manufacturing — Australian designed & manufactured*



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: [nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)  
[www.ocloc.com.au](http://www.ocloc.com.au)

# OCAG OK